

ATMOS Zubehör / Accessory

Produktbezeichnung / Product name	Wand- und Gerätehalterung für ATMOS Notfallsauger <i>Wall and device support for ATMOS emergency device</i>
Kurzbeschreibung / Short description	Halterung für ATMOS C 341 Battery und ATMOS E 341 Battery. Einfache Entnahme der ATMOS Notfallsauger aus der Halterung dank Einhand-Entriegelung per Tastendruck. Zur direkten Montage der ATMOS Notfallsauger an einer Wand bzw. an einer Normschiene. Das Ladezubehör der ATMOS Notfallsauger kann an der Wand- und Gerätehalterung einfach angebracht werden, sodass die Geräte automatisch geladen werden können. <i>Support for ATMOS C 341 Battery and ATMOS E 341 Battery. Easy removal of the ATMOS emergency suction device from the support thanks to one-hand release at the touch of a button. For direct mounting of the ATMOS emergency suction devices to the wall respectively to a standard rail. The charging accessories of the ATMOS emergency suction device can easily be attached to the wall and device support so that the device is recharged automatically.</i>
Varianten / Variants	Keine Varianten <i>No variants</i>
Verwendbar mit / Usable with	ATMOS C 341 Battery und ATMOS E 341 Battery
Material / Material	Aluminiumblech <i>Aluminium sheet</i>
Farbe / Colour	RAL 7046 – Telegrau RAL 7046 - Telegrey
Abmessungen / Dimensions	L: 181 mm H: 219,4 mm T: 51,3 mm
Gewicht / Weight	320 g

Version:	00	Project:	KT-0066	Template:	VT-0341-03
Designed by:	MBenitz	Date of Design:	21.04.2022	Template Date of Release:	09.02.2022
Checked by:	AHeer	Date of Check:	21.04.2022		
Record number:	PD-8717	Page:	1 of 3		

TS_Technische Daten Zubehör
 TS_Technical specifications accessory




ATMOS Zubehör / Accessory

Verpackungseinheit / Packaging unit	1 Stück <i>1 piece</i>
Wiederverwendung / Reuse	Wiederverwendung <i>Reusable</i>
Aufbereitung / Reprocessing	Wischdesinfektion <i>Wipe disinfection</i>
Risikoklasse / Risk classification (MDR)	Klasse 1 nach Regel 1 <i>Class 1 according to Rule 1</i>
CE-Kennzeichnung / CE marking	CE
Umgebungsbedingungen / Environmental conditions: Transport/Lagerung / Transport/storage (Standard)	-10...+50 °C 30...95 % 700...1060 hPa
Umgebungsbedingungen / Environmental conditions: Betrieb / Operation (Standard)	-10...+50 °C 30...95 % 700...1060 hPa
Artikelnummer / Reference number (REF)	318.1250.0

Version:	00	Project:	KT-0066	Template:	VT-0341-03
Designed by:	MBenitz	Date of Design:	21.04.2022	Template Date of Release:	09.02.2022
Checked by:	AHeer	Date of Check:	21.04.2022		
Record number:	PD-8717	Page:	2 of 3		

ATMOS Zubehör / Accessory

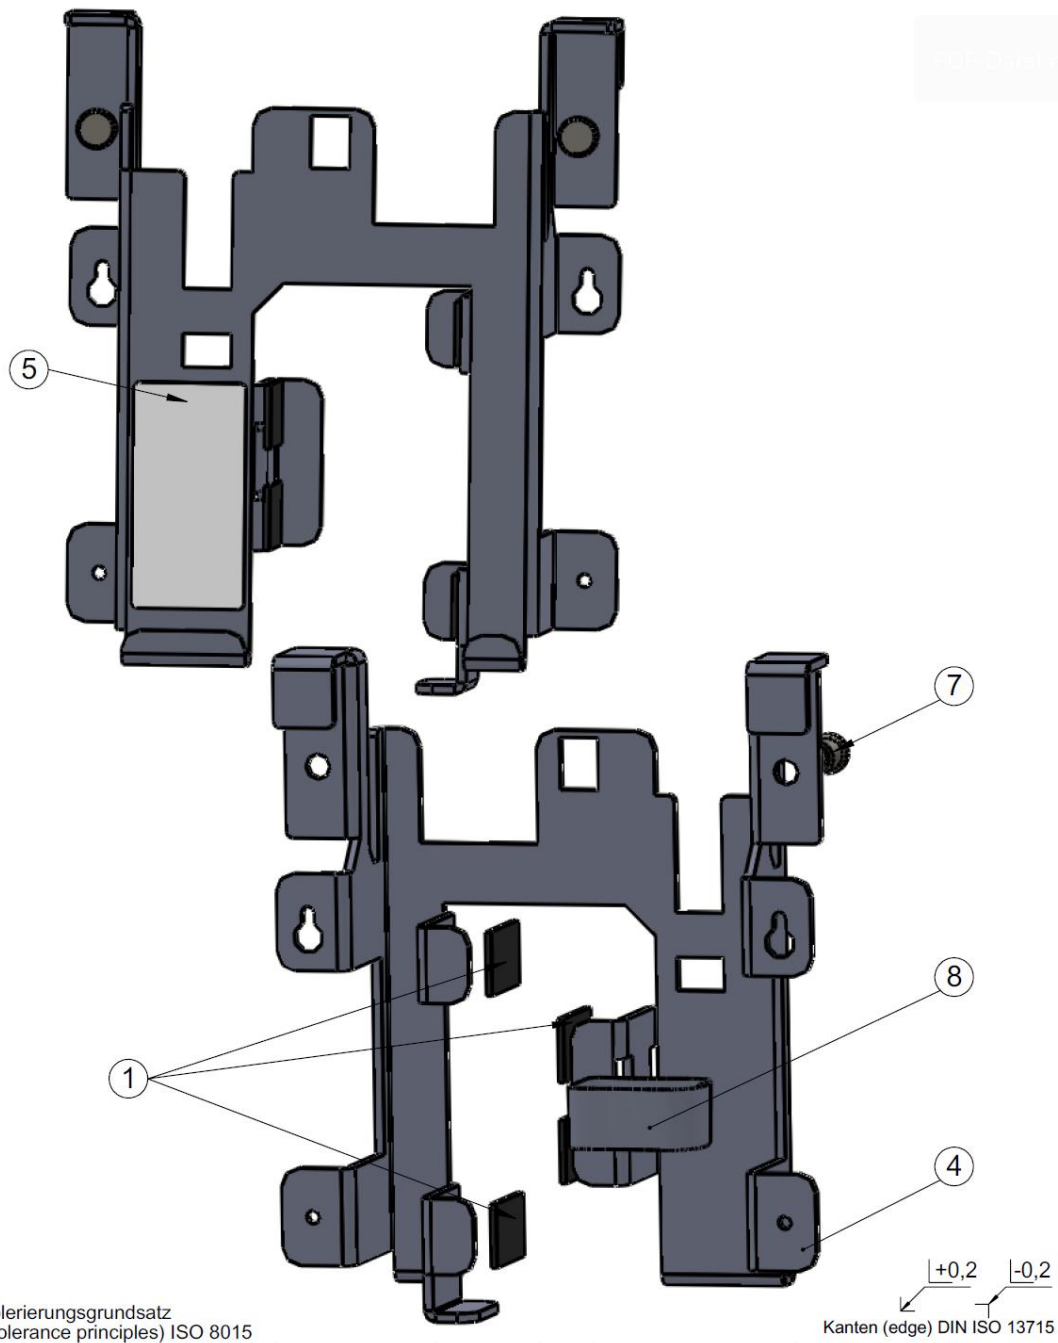

Tolerierungsgrundsatz
 (Tolerance principles) ISO 8015

Version:	00	Project:	KT-0066	Template:	VT-0341-03
Designed by:	MBenitz	Date of Design:	21.04.2022	Template Date of Release:	09.02.2022
Checked by:	AHeer	Date of Check:	21.04.2022		
Record number:	PD-8717	Page:	3 of 3		